


**CLASSIC  
COLLECTION**

*by Somerset™*



APPALACHIAN OAK FLOORING  
WITH A LIGHTLY TEXTURED SURFACE  
FOR A MORE DURABLE APPEARANCE.

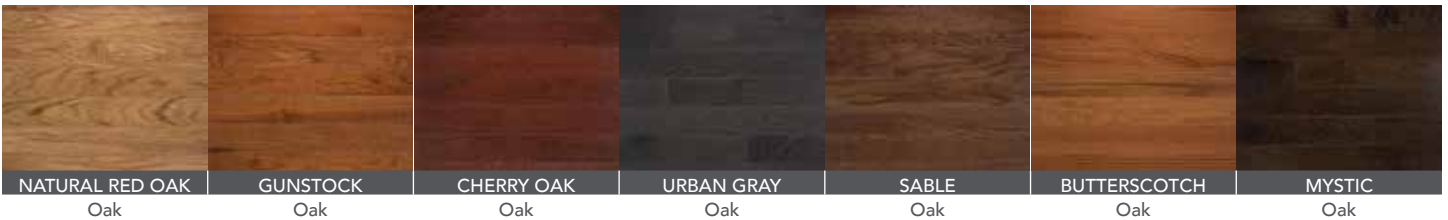

**S SOLID**  
3/4" thick, random lengths up to 6-1/2'  
WIDTHS: 2-1/4", 3-1/4"

**S SOLIDPLUS® ENGINEERED**  
1/2" thick, 3mm thick solid sawn wear  
layer, 8-ply, random lengths up to 6-1/2'  
WIDTHS: 3-1/4", 5"



PRODUCT SPECIFICATION SHEET

05/23

# CLASSIC: SOLID



Product:	Somerset <b>Classic Collection</b> Solid Hardwood Flooring			
Species:	Appalachian Oak (Somerset does not mix species.)			
Grade:	Proprietary Somerset grade			
Dimensions:	<b>Thickness:</b> 3/4"* <b>Widths:</b> 2-1/4", 3-1/4" <b>Lengths:</b> Random from 10" up to 6-1/2' <small>*Nominal</small>			
Construction:	Traditional 3/4" solid construction produced from domestically grown and harvested Appalachian hardwood. Material conforms to Appalachian Hardwood Manufacturers, Inc.'s Verified Sustainable Seal ( <a href="http://www.appalachianwood.org">www.appalachianwood.org</a> ). Product is also affiliated with the National Wood Flooring Association.			
Profile:	Eased Edge, Square End			
Finish:	Ultimate™ Urethane Finish—UV Cured Aluminum Oxide, Abrasion Resistant Finish			
Colors:	<b>2 1/4" Width</b>	<b>3 1/4" Width</b>	<b>Species</b>	
	Natural Red Oak	CL2101	CL3101	Oak
	Gunstock	CL2104	CL3104	Oak
	Cherry Oak	CL2105	CL3105	Oak
	Urban Gray	CL2107	CL3107	Oak
	Sable	CL2108	CL3108	Oak
	Butterscotch	CL2109	CL3109	Oak
	Mystic	CL2110	CL3110	Oak
Gloss Level:	Low Gloss			
Janka Hardness:	<b>Species</b>	<b>Lbs</b>		
	Oak	1290-1360		
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request			
Installation:	Nail down or staple, on or above grade. (NWFA Installation Guidelines and Methods, revised: March, 2019.) Installation guidelines are available at <a href="http://www.somersetfloors.com">www.somersetfloors.com</a>			
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )			
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )			
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer			



PRODUCT SPECIFICATION SHEET

05/23

# CLASSIC: SOLIDPLUS® ENGINEERED



Product:	Somerset <b>Classic Collection</b> Solid <b>Plus</b> Engineered Hardwood Flooring			
Species:	Appalachian Oak (Somerset does not mix species.)			
Grade:	Proprietary Somerset grade			
Dimensions:	<b>Thickness:</b> 1/2"*; 3mm* thick solid dry sawn wear layer <b>Widths:</b> 3-1/4", 5" <b>Lengths:</b> Random from 10" up to 6-1/2' <small>*Nominal</small>			
Construction:	8-ply cross-grain engineered construction; 7-ply hardwood core.			
Profile:	Eased Edge, Eased End			
Finish:	Ultimate™ Urethane Finish—UV Cured Aluminum Oxide, Abrasion Resistant Finish			
Colors:	<b>3 1/4" Width</b>	<b>5" Width</b>	<b>Wear Layer Species</b>	
	Natural Red Oak	EP314CLROE	EP512CLROE	Oak
	Gunstock	EP314CLGUE	EP512CLGUE	Oak
	Cherry Oak	EP314CLCOE	EP512CLCOE	Oak
	Urban Gray	EP314CLUGE	EP512CLUGE	Oak
	Sable	EP314CLSBE	EP512CLSBE	Oak
	Butterscotch	EP314CLBUE	EP512CLBUE	Oak
	Mystic	EP314CLMYE	EP512CLMYE	Oak
Gloss Level:	Low Gloss			
Janka Hardness:	<b>Species</b>	<b>Lbs</b>		
	Oak	1290-1360		
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request			
Formaldehyde Emissions:	ASTM D6007; BQL (below quantification limit—.008ppm) TSCA Title VI Compliant			
Critical Radiant Flux (CRF):	ASTM E648 (0.33 critical radial flux)			
Installation:	Nail, staple, glue down, or float on, above or below grade (ground level). (NWFA Installation Guidelines and Methods, revised: March, 2019.) Installation guidelines are available at <a href="http://www.somersetfloors.com">www.somersetfloors.com</a>			
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )			
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )			
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer			