



**COLOR PLANK
COLLECTION**
—by Somerset™—

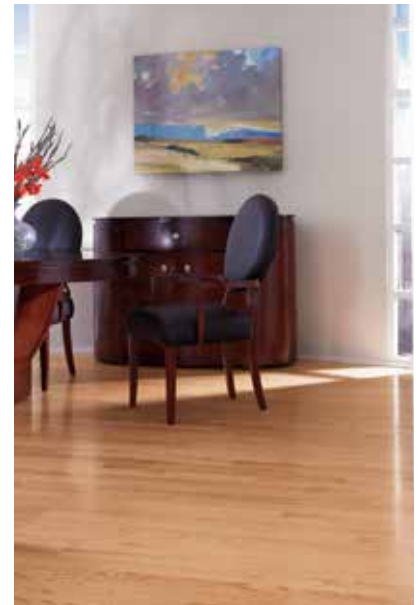

SOLID APPALACHIAN OAK FLOORING IN
PLANK WIDTHS AND POPULAR COLORS—
TO ADD TIMELESS STYLE TO YOUR SPACE.

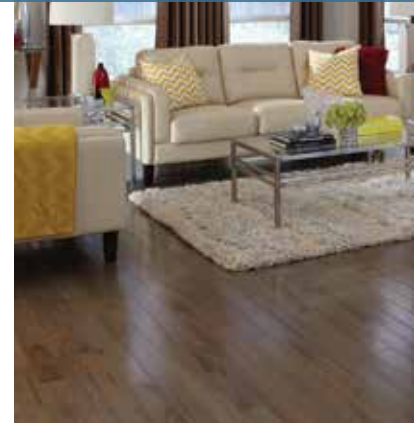

S SOLID
3/4" thick, random lengths up to 6-1/2"
WIDTHS: 4", 5"

S SOLIDPLUS® ENGINEERED
1/2" thick, 3mm thick solid sawn wear
layer, 8-ply, random lengths up to 6-1/2"
WIDTHS: 3-1/4", 5"



PRODUCT SPECIFICATION SHEET

05/23

COLOR PLANK: SOLID



Product:	Somerset Color Plank Collection Solid Hardwood Flooring			
Species:	Red Oak or White Oak (Somerset does not mix species.)			
Grade:	Proprietary Somerset grade			
Dimensions:	Thickness: 3/4"* Widths: 4", 5" Lengths: Random from 10" up to 6-1/2' <small>*Nominal</small>			
Construction:	Traditional 3/4" solid construction produced from domestically grown and harvested Appalachian hardwood. Material conforms to Appalachian Hardwood Manufacturers, Inc.'s Verified Sustainable Seal (www.appalachianwood.org). Product is also affiliated with the National Wood Flooring Association.			
Profile:	Eased Edge, Eased End			
Finish:	Ultimate™ Urethane Finish—UV Cured Aluminum Oxide, Abrasion Resistant Finish			
Colors:	4" Width	5" Width	Species	
	Natural Red Oak	PP41ROB	PP51ROB	Red Oak
	Natural White Oak	PP41WOB	PP51WOB	White Oak
	Golden Oak	PP41GOB	PP51GOB	Red Oak
	Gunstock	PP41GUB	PP51GUB	White Oak
	Mocha	PP41MOB	PP51MOB	Red Oak
	Smoke	PP41SMB	PP51SMB	Red Oak
	Metro Brown	PP41MBB	PP51MBB	White Oak
Gloss Level:	Semi Gloss			
Janka Hardness:	Species	Lbs		
	Red Oak	1290		
	White Oak	1360		
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request			
Installation:	Nail down or staple, on or above grade. (NWFA Installation Guidelines and Methods, revised: March, 2019 .) Installation guidelines are available at www.somersetfloors.com			
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner (www.somersetfloors.com)			
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity (www.somersetfloors.com)			
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer			

COLOR PLANK: SOLIDPLUS® ENGINEERED



Product:	Somerset Color Plank Collection Solid Plus Engineered Hardwood Flooring			
Species:	Red Oak or White Oak (Somerset does not mix species.)			
Grade:	Proprietary Somerset grade			
Dimensions:	Thickness: 1/2"*; 3mm* thick solid dry sawn wear layer Widths: 3-1/4", 5" Lengths: Random from 10" up to 6-1/2' *Nominal			
Construction:	8-ply cross-grain engineered construction; 7-ply hardwood core.			
Profile:	Eased Edge, Eased End			
Finish:	Ultimate™ Urethane Finish—UV Cured Aluminum Oxide, Abrasion Resistant Finish			
Colors:	3/4" Width	5" Width	Wear Layer Species	
	Natural Red Oak	EP314ROE	EP512ROE	Red Oak
	Natural White Oak	EP314CPWOE	EP512CPWOE	White Oak
	Golden Oak	EP314GOE	EP512GOE	Red Oak
	Gunstock	EP314GUE	EP512GUE	White Oak
	Mocha	EP314MOE	EP512MOE	Red Oak
	Smoke	EP314SME	EP512SME	Red Oak
	Metro Brown	EP314MBE	EP512MBE	White Oak
Gloss Level:	Semi Gloss			
Janka Hardness:	Species	Lbs		
	Red Oak	1290		
	White Oak	1360		
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request			
Formaldehyde Emissions:	ASTM D6007; BQL (below quantification limit—.008ppm) TSCA Title VI Compliant			
Critical Radiant Flux (CRF):	ASTM E648 (0.33 critical radial flux)			
Installation:	Nail, staple, glue down, or float on, above or below grade (ground level). (NWFA Installation Guidelines and Methods, revised: March, 2019 .) Installation guidelines are available at www.somersetfloors.com			
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner (www.somersetfloors.com)			
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity (www.somersetfloors.com)			
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer			