


COLLECTIONS OVERVIEW

MFG

USA

FROM SLEEK MODERN STYLES TO RUSTIC CHARACTER AND LIGHTLY TEXTURED CHOICES, YOU'LL FIND FLOORING TO INSPIRE YOUR IMAGINATION AND MAKE YOUR SPACE JUST WHAT YOU ENVISION.

FLOORING TO LAST A LIFETIME | PROTECTED BY THE ULTIMATE[™] FINISH | 50-YEAR ULTIMATE FINISH WARRANTY

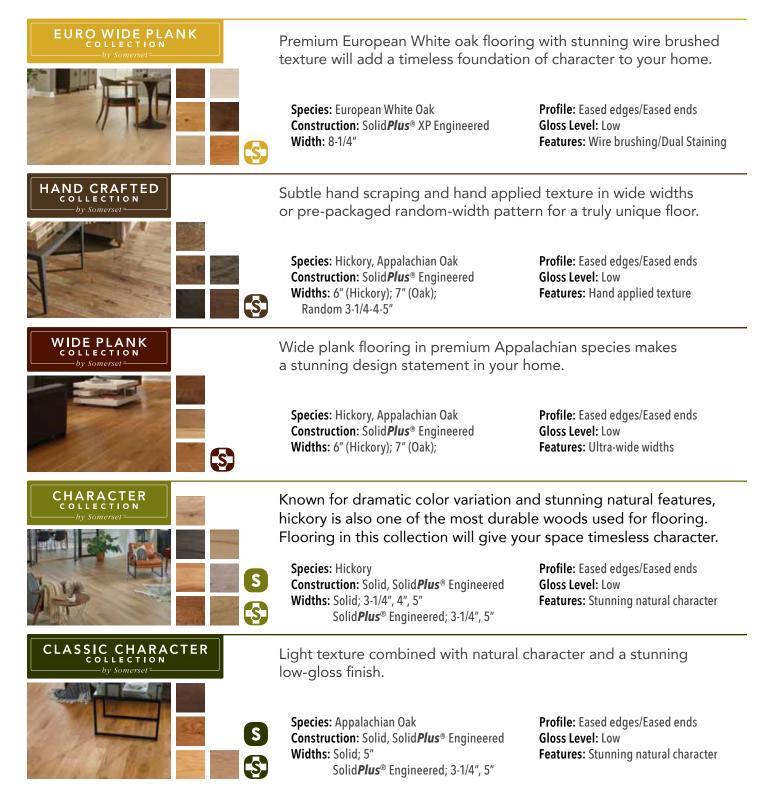

CLASSIC collection by Somerset	Premium Appalachian oak flooring with a light texture and low-gloss finish.	
	Widthe: Solid: 21/1" 21/1"	Profile: Solid – Eased edges/Square ends Engineered – Eased edges/Eased ends Gloss Level: Low Features: Lightly textured surface
COLOR PLANK COLLECTION by Somerset	Solid Appalachian oak flooring in plank widths and popular colors to add timeless style to your space.	
	Widths: Solid: 1" 5"	Profile: Eased edges/Eased ends Gloss Level: Semi-gloss Features: Smooth finish
COLOR STRIP collection by Somerset	Solid Appalachian oak flooring in popular stain colors. (These colors are also available in plank widths and in Solid Plus® engineered construction in our Color Plank Collection.)	
S	Species: Appalachian Oak Construction: Solid Widths: 2-1/4", 3-1/4"	Profile: Eased edges/Square ends Gloss Level: Semi-gloss Features: Smooth finish
HOMESTYLE collection by Somerset	Solid Appalachian oak flooring with the added design feature of a four-sided eased edge.	
S	Species: Appalachian Oak Construction: Solid Widths: 2-1/4", 3-1/4"	Profile: Eased edges/Eased ends Gloss Level: Semi-gloss Features: Smooth finish
HIGH GLOSS COLLECTION by Somerset	Solid Appalachian oak flooring with a higher gloss finish will make your space shine.	
S	Species: Appalachian Oak Construction: Solid Widths: 2-1/4", 3-1/4"	Profile: Eased edges/Square ends Gloss Level: High gloss Features: Smooth, high gloss finish
THE BEAUTY OF REAL SOLID WOOD! SOMERSET GIVES YOU OPTIONS.		
S	SOLIDPLUS* ENGINEERED	SOLIDPLUS. XP ENGINEERED

1/2" thick, 3mm wear layer, multi-ply premium plywood core Install on, above , or below grade and over radiant heat.

3/4" traditional solid Install on or above grade.

nw

9/16" thick, 3.5mm wear layer, multi-ply premium lumber core

Install on, above , or below grade and over radiant heat.

