



**HAND CRAFTED
COLLECTION**


by Somerset™

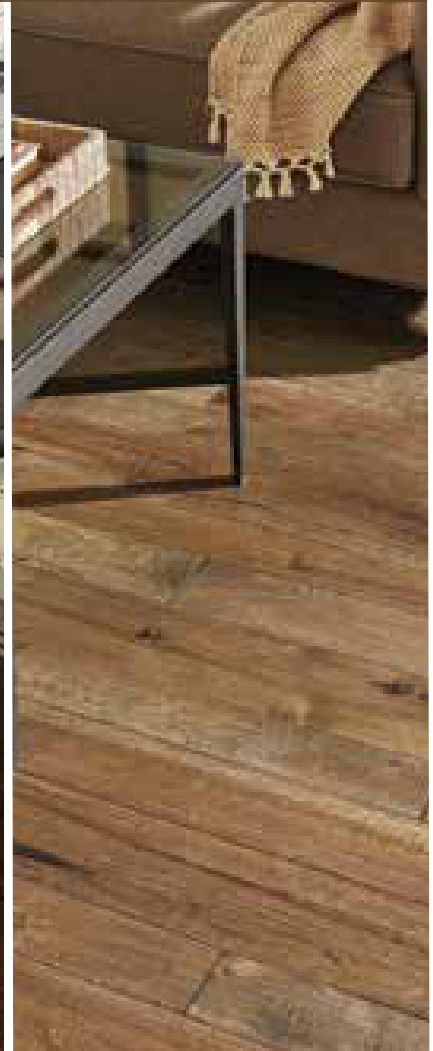

WINTER WHEAT
Hickory




ANTIQUE BRONZE
Hickory



ROYAL BROWN
White Oak



VINTAGE OAK
White Oak



RUSTIC AUTUMN
White Oak

HAND APPLIED TEXTURE,
MODERN RUSTIC LOOK



SOLIDPLUS® ENGINEERED
1/2" thick, 3mm thick wear layer, 8-ply,
random lengths from 10" to 6-1/2'
RANDOM WIDTHS: 3-1/4" – 4" – 5"
WIDTHS: Hickory 6"; Oak 7"



PRODUCT SPECIFICATION SHEET

02/24

HAND CRAFTED: SOLID**PLUS**® ENGINEERED



Product:	Somerset Hand Crafted Collection Solid Plus Engineered Hardwood Flooring				
Species:	Hickory, White Oak (Somerset does not mix species.)				
Grade:	Proprietary Somerset grade				
Dimensions:	Thickness: 1/2"*; 3mm* thick solid dry sawn wear layer Widths: 3-1/4" - 4" - 5" Random; 6", 7" Lengths: Random from 10" to 6-1/2' *Nominal				
Construction:	Multi ply cross-grained engineered construction; premium hardwood plywood core				
Profile:	Eased Edges, Eased Ends				
Finish:	Ultimate™ Urethane Finish—UV Cured Aluminum Oxide, Abrasion Resistant Finish				
Colors:		3 1/4" - 4" - 5" Widths	6" Width	7" Width	Wear Layer Species
	Winter Wheat	EPHCWWRLE	EPHCWW6E		Hickory
	Antique Bronze	EPHCABRLE	EPHCAB6E		Hickory
	Royal Brown	EPHCRBRLE		EPHCRB7E	White Oak
	Vintage Oak	EPHCVORLE		EPHCVO7E	White Oak
	Rustic Autumn	EPHCRARLE		EPHCRA7E	White Oak
Gloss Level:	Low Gloss				
Janka Hardness:	Species	Lbs			
	White Oak	1360			
	Hickory	1820			
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request				
Formaldehyde Emissions:	ASTM D6007; BQL (below quantification limit—.008ppm) CARB Phase 2 Compliant				
Critical Radiant Flux (CRF):	ASTM E648 (0.33 critical radial flux)				
Installation:	Nail, staple, glue down, or float on, above or below grade (ground level). (NWFA Installation Guidelines and Methods, revised: March, 2007.) Installation guidelines are available at www.somersetfloors.com				
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner (www.somersetfloors.com)				
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity (www.somersetfloors.com)				
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer				